
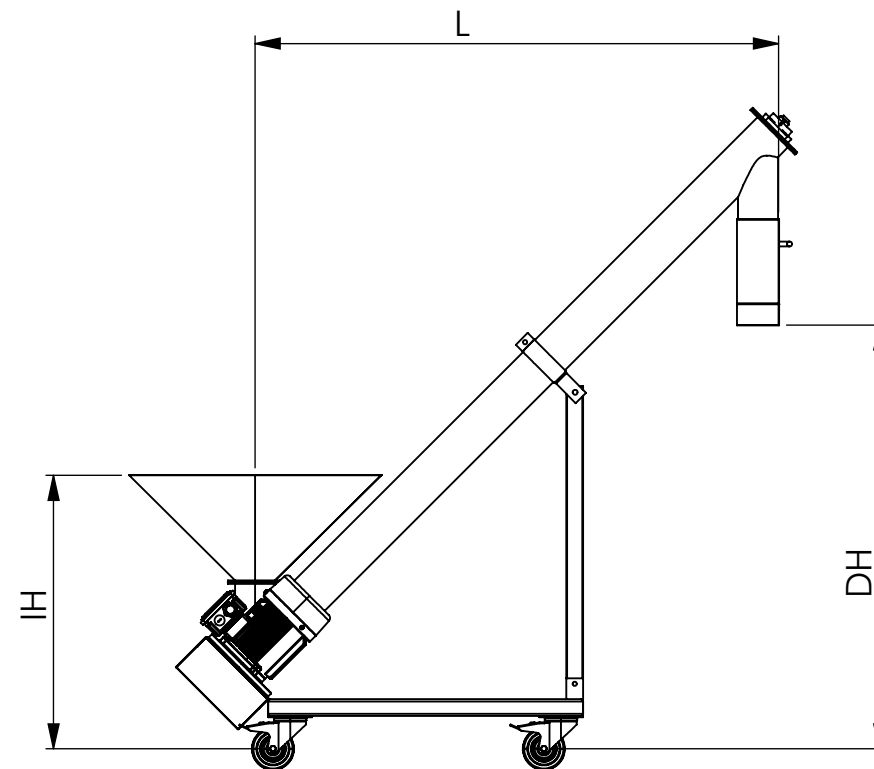
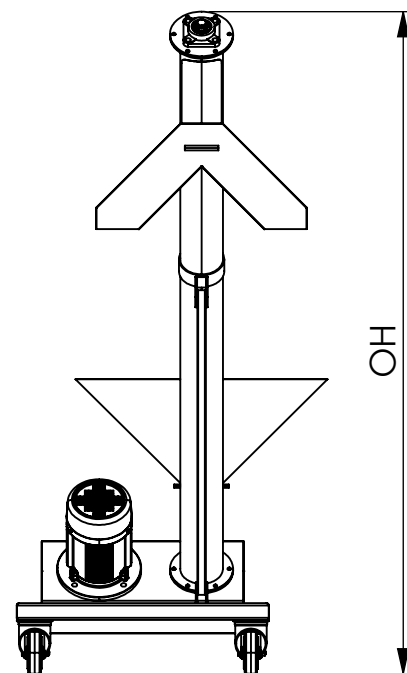
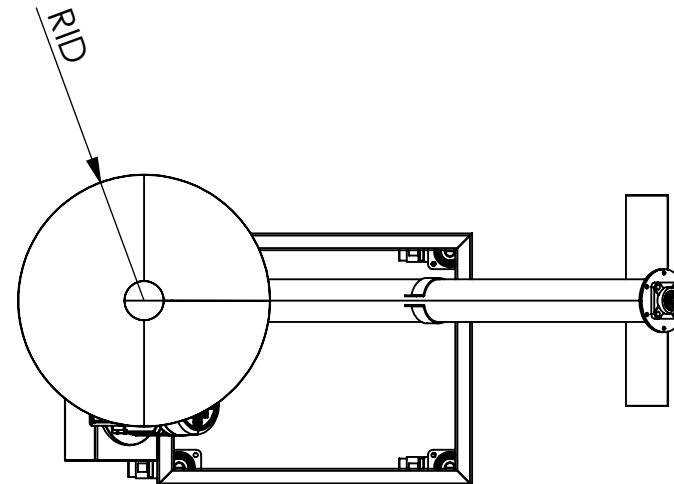


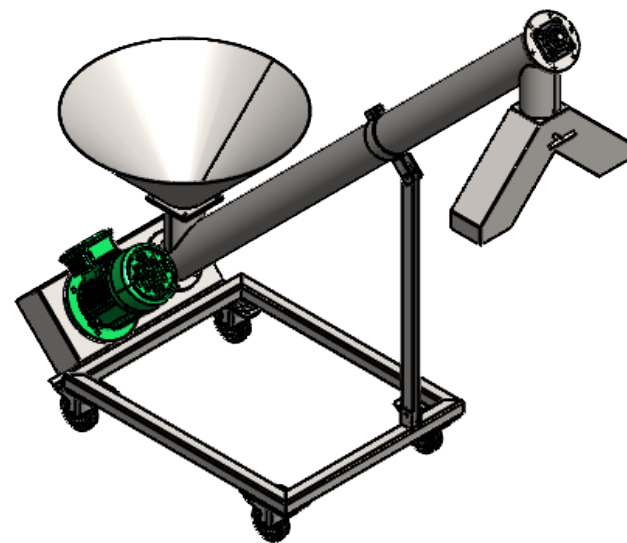

Srew Conveyor

1. MOC: SS304/S316/MS
2. Capacity: 100- 1000 kg/hr
3. Screw Size: OD 50mm to as large as 500mm
4. Through Type: Tubular/ U trough
5. Geared Motor: Nord/SEW/Bonfiglioli
Helical Geared motor
(Ratio & power as per application)
6. Coupling: chain type coulping/ direct
Coupled Geared motor
7. Bearing: Flange Type UFL/UCF bearing
8. Tough Thickness: 3mm-6mm
9. Leg Frame: SQ. Tube 60/ 80mmx3 mm Structure
10. Screw Flight Thickness: 3mm-6mm
11. Shaft dia:38mm/60mm/89mm hollow shaft
12. Top door with Hinge & Safety sensor
(optional for easy clean Application)
13. Sealing: Mechanical seal / Static Seal
14. Discharge Gate : Manual/ Pneumatic type
/ Diverter/Twin discharge
15. Inlet Type: Inlet Hopper with or
Without Agitator/ Pipe inlet etc

Unless Otherwise Stated		Part Number: Screw Feeding Conveyor	
Tol On Linear		Description:	
0.5 up to 6	±0.1	Material : --	
6 up to 120	±0.2		
120 up to 400	±0.5		
400 up to 1000	±0.8		
1000 up to 2000	±1.2		
Tol On Angular		Approx Weight	
up to 10	±1°	45.67	
10 up to 50	±0°0.3'	kg	
50 up to 120	±0°0.2'	C2D LLP	
above 120	±0°0.1'		
Projection:		Sheet Size	Revision
		A3	AN
		Sheet 1 of 1	Y