
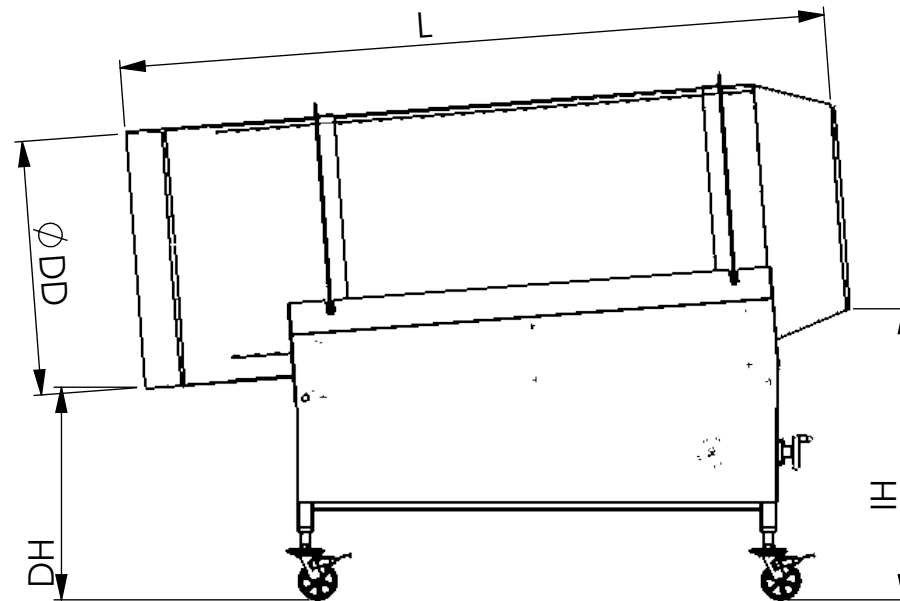
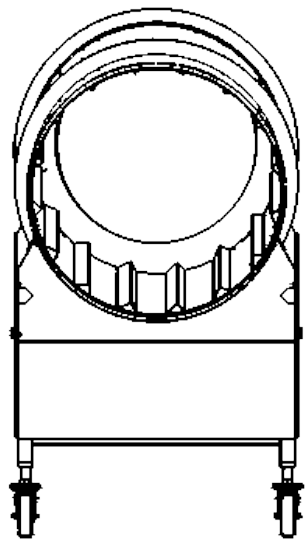
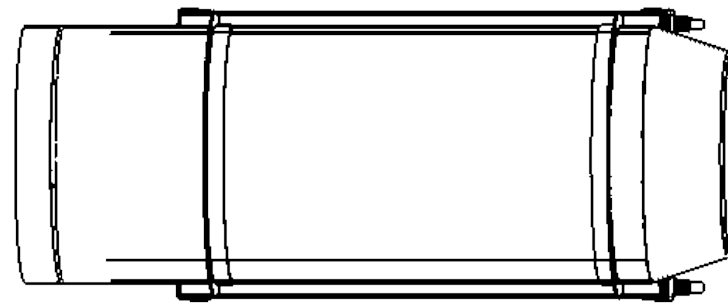


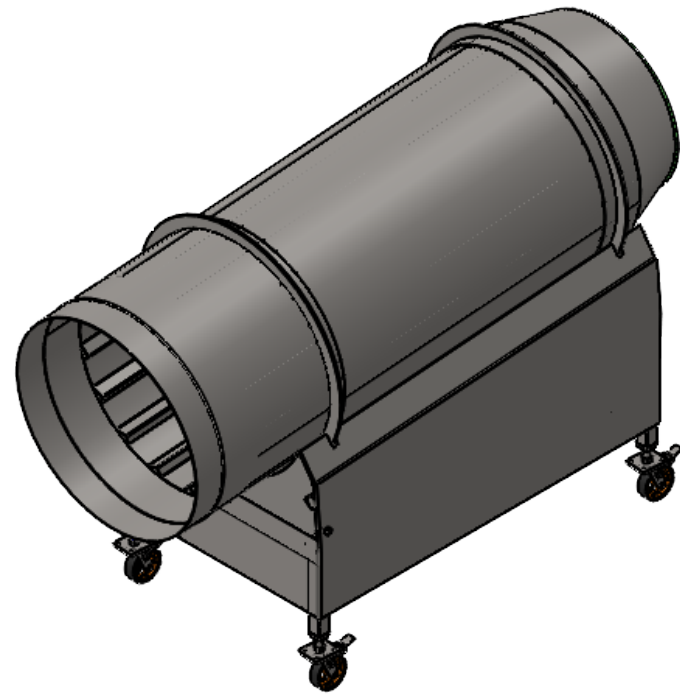

Seasoning Drum

1. MOC: SS304/S316
2. Capacity: 250- 2000 kg/hr
3. Drum Type: V flight with our without screw arrangement inside
(Flight size and Height customizable as per Application)
4. Frame type: Tubular
5. Geared Motor: Nord/SEW/Bonfiglioli
Helical Geared motor
(Ratio & power as per application)
6. Coupling: chain type coupling/ direct
Coupled Geared motor/Chain drive/ Timing pulley
7. Bearing: Flange Type UFL/UCF bearing
8. Drum Thickness: 3mm
9. Leg Frame: SQ. Tube 40/ 60/80mmx3 mm Structure
10. Shaft dia:38mm/60mm/89mm hollow /solid shaft
11. Discharge Gate : Chute/ Hopper/ Diverter
12. Inlet Type: With or without Inlet Hopper
13. Optional: Inlet And Outlet cover with dust extraction Mechanism

Unless Otherwise Stated		Part Number: Seasoning Drum	
Tol On Linear		Description:	
0.5 up to 6	±0.1	Material : --	
6 up to 120	±0.2		
120 up to 400	±0.5		
400 up to 1000	±0.8		
1000 up to 2000	±1.2		
Tol On Angular		Approx Weight	
up to 10	±1°	967.21 kg	
10 up to 50	±0° 0.3'	C2D LLP	
50 up to 120	±0° 0.2'		
above 120	±0° 0.1'		
Projection:		Sheet Size	Revision
		A3	1 of 1