


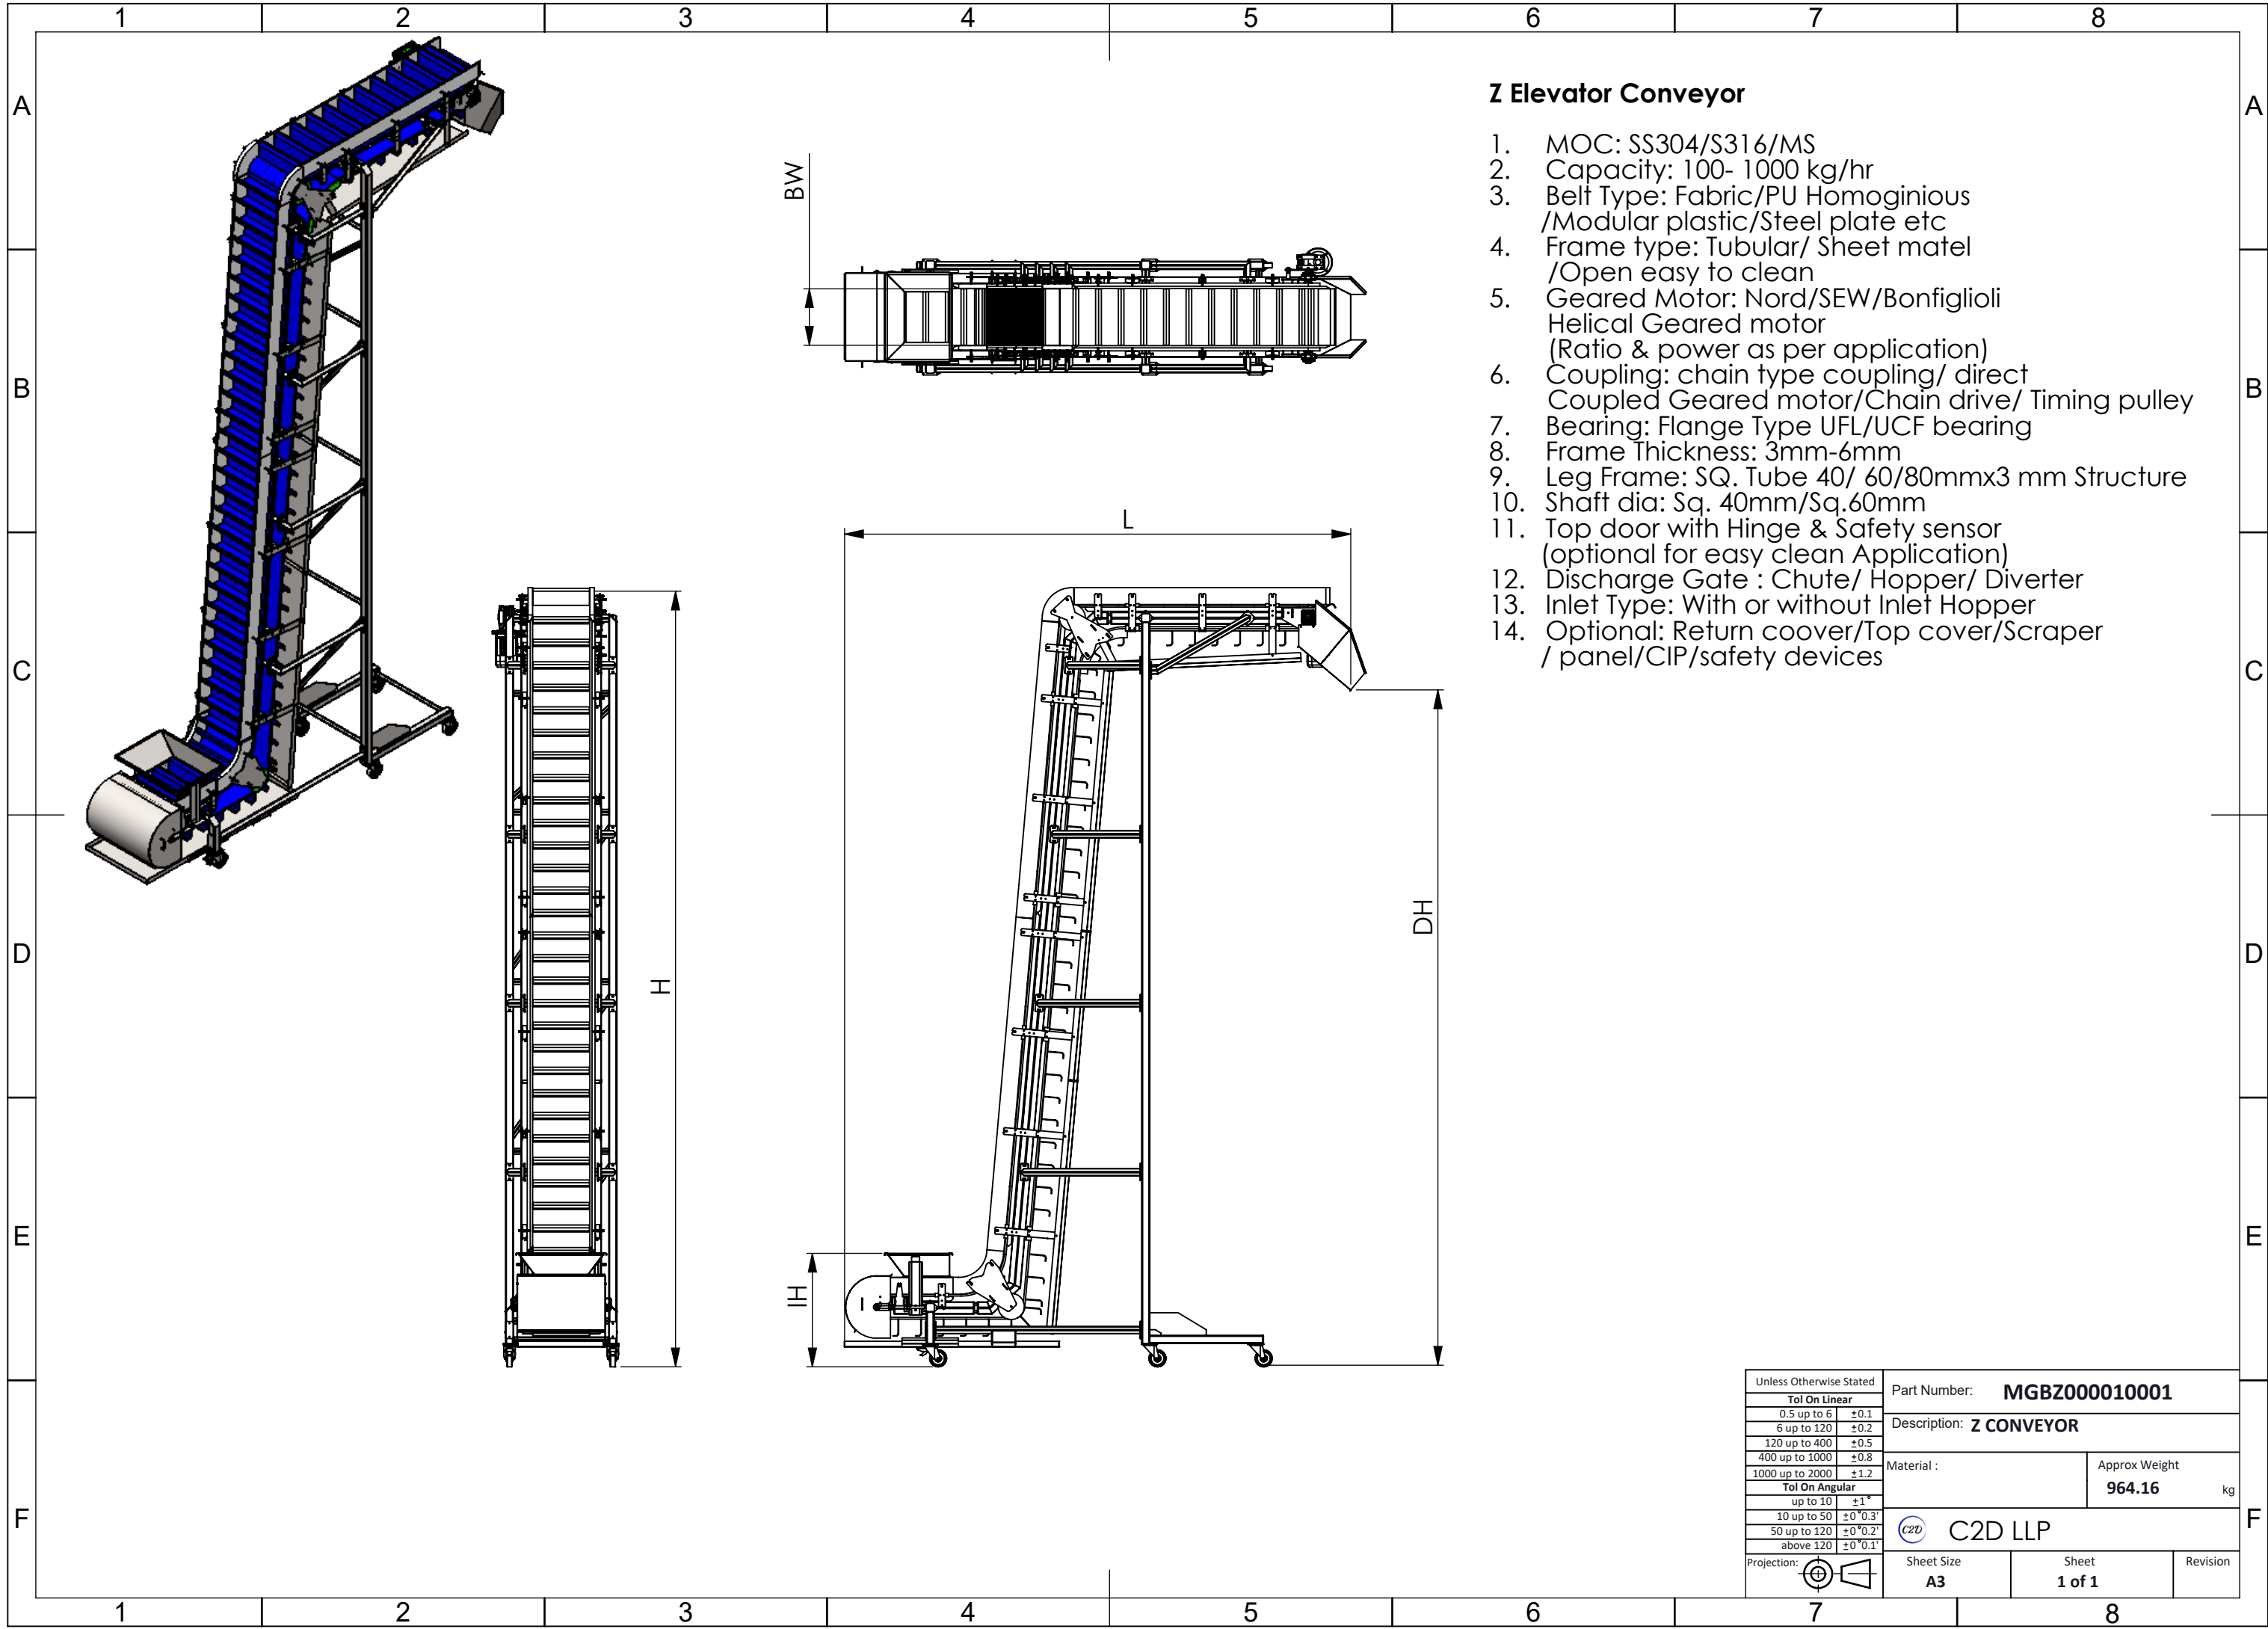

Z Elevator Conveyor

- 1. MOC: SS304/S316/MS
- 2. Capacity: 100- 1000 kg/hr
- 3. Belt Type: Fabric/PU Homoginious /Modular plastic/Steel plate etc
- 4. Frame type: Tubular/ Sheet matel /Open easy to clean
- 5. Geared Motor: Nord/SEW/Bonfiglioli Helical Geared motor (Ratio & power as per application)
- 6. Coupling: chain type coupling/ direct Coupled Geared motor/Chain drive/ Timing pulley
- 7. Bearing: Flange Type UFL/UCF bearing
- 8. Frame Thickness: 3mm-6mm
- 9. Leg Frame: SQ. Tube 40/ 60/80mmx3 mm Structure
- 10. Shaft dia: Sq. 40mm/Sq.60mm
- 11. Top door with Hinge & Safety sensor (optional for easy clean Application)
- 12. Discharge Gate : Chute/ Hopper/ Diverter
- 13. Inlet Type: With or without Inlet Hopper
- 14. Optional: Return coover/Top cover/Scraper / panel/CIP/safety devices

Unless Otherwise Stated		Part Number: MGBZ000010001		
Tol On Linear		Description: Z CONVEYOR		
0.5 up to 6	±0.1	Material : Approx Weight 964.16 kg		
6 up to 120	±0.2			
120 up to 400	±0.5			
400 up to 1000	±0.8			
1000 up to 2000	±1.2			
Tol On Angular		C2D C2D LLP		
up to 10	±1°			
10 up to 50	±0° 0.3'			
50 up to 120	±0° 0.2'			
above 120	±0° 0.1'			
Projection:		Sheet Size A3	Sheet 1 of 1	Revision