
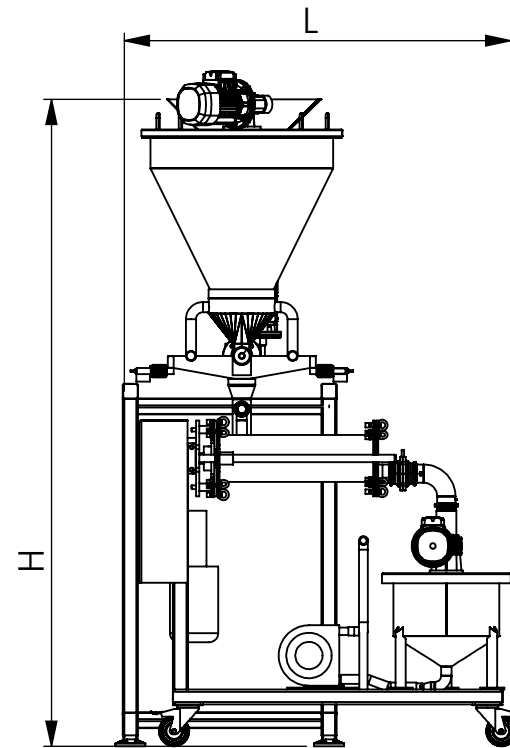
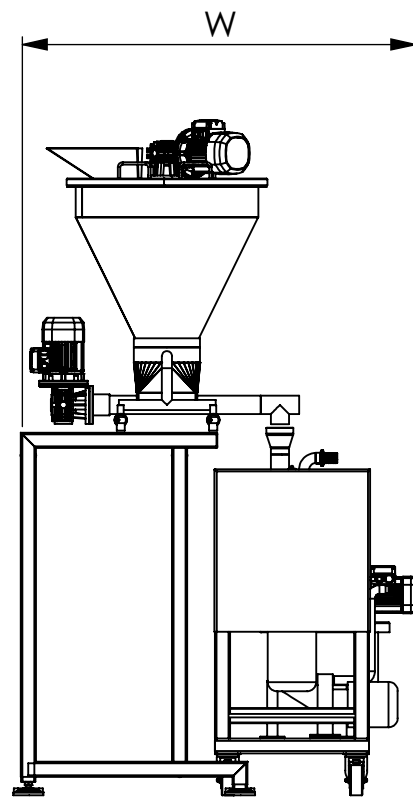
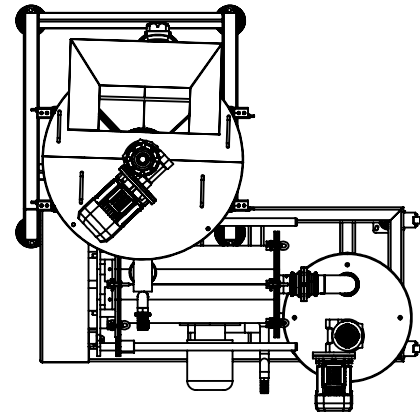
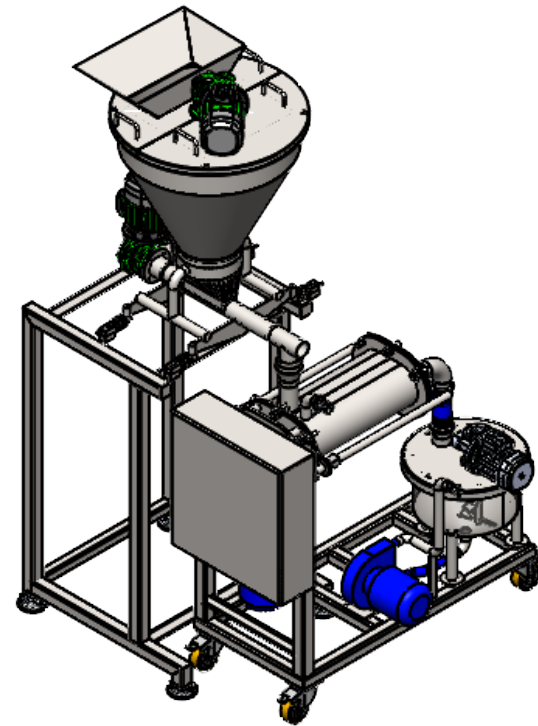




On demand Slurry Mixer

1. MOC: SS304/S316
2. Capacity: 50- 1000kg/hr
3. Mixer Type: Twin shaft paddle type high speed mixer
4. RPM: 100-300 RPM
5. Geared Motor: Nord/SEW/Bonfiglioli
Helical/ Geared motor
(Ratio & power as per application)
6. Coupling: Direct coupled
7. Bearing: Angular contact Ball bearing
in customised housing
8. Trough Thickness: 3mm
9. Leg Frame: SQ. Tube 40/ 60/80mmx3 mm Structure
10. Shaft dia:30mm/50mm/80mm solid shaft
11. Discharge Gate : Chute/ Hopper/ Diverter
12. Powder Inlet: Load cell based (LIW) Powder hopper
with screw feeder , Capcity-50/100 kg
13. Oil/ Liquid inlet: Direct Inlet in through , flow with flow meter
14. Dosing Pump: Peristaltic Pump 0.37/0.55 Kw motor ,
1 inch outlet connection

Unless Otherwise Stated Tol On Linear 0.5 up to 6 ±0.1 6 up to 120 ±0.2 120 up to 400 ±0.5 400 up to 1000 ±0.8 1000 up to 2000 ±1.2 Tol On Angular up to 10 ±1° 10 up to 50 ±0°0.3' 50 up to 120 ±0°0.2' above 120 ±0°0.1'	Part Number: OSM		
	Description:		
	Material : --		Approx Weight
			0.00 kg
	 C2D LLP		
	Projection: 	Sheet Size A3	Sheet 1 of 1
		Revision	